

• Due to updates and improvements, the appearance, specifications and contents of the products may be modified without prior notice.
We hereby declare and thanks for your understanding

• Güncellemeler ve iyileştirmeler nedeniyle, ürünlerin görünümü, özellikleri ve içeriği önceden haber verilmeksizin değiştirilebilir. Anlayışınız için teşekkür eder, saygılarımızı sunarız.



VIOS®

BULTEK




2025 Ürün Kataloğu | 2025 Product Catalog

BULTEK TEKSTİL MAKİNALARI SAN. VE TİC. A.Ş.

ADRES: BAĞLAR MAH. MİMAR SİNAN CAD. NO:21/C
BAĞCILAR / İSTANBUL
TELEFON: +90 (850) 308 90 35
TELEFON: +90 (537) 331 58 01
WEB: <http://www.bultek.com.tr>

KOD DİYAGRAMI CODE DIAGRAM

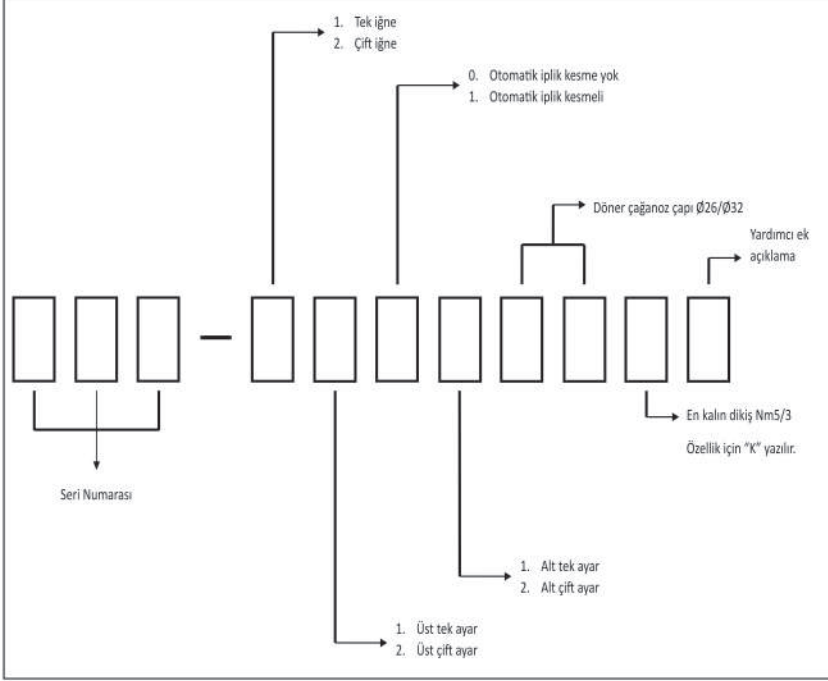

Nominal Voltaj Nominal Voltage	Güç Tüketimi Power Consumption	Ağırlık Komple Weight Complete	Boyut (uzunluk, genişlik, Yükseklik) Dimension (length, width, Height)	mm	
[V] [Hz] 1x200 ~ 240V 50/60Hz	[KVA] 0.75	[Kg] 70	[mm] 750x390x730	[mm] 0 ~ 12	[N.] [Bar] 4.0 6.0

Tip Type	Özellikler Specification	LED	Baskı ayağının kullanım ömrü Presser foot life	Kilit Dikiş Lockstitch	Looper çapraz hat Looper crossline	İğne ipliği izleme Needle thread monitor
DPx35	90-180	Work light Çalışma ışığı	Baskı ayağı kaldırma yüksekliği Presser foot lifting height 0-20mm	Kilit Dikiş Lockstitch	Mekik döndürme Shuttle spin	çalışma alanı operating space 335x120

İçindekiler Content


669 Serisi 669 Series	1
669 Mekanik 669 Mechanic.....	1
669 Otomatik 669 Automatic.....	2
877 Serisi 877 Series	3
877 Tek İğneli 877 Single Needle	3
877 Çift İğneli 877 Double Needle	4
878 Serisi 878 Series	5
878 Mekanik Tek İğneli 878 Mechanic Single Needle	5
878 Mekanik Çift İğneli 878 Mechanic Double Needle	6
878 Otomatik Tek İğneli 878 Automatic Single Needle.....	7
878 Otomatik Çift İğneli 878 Automatic Double Needle.....	8

VIOS®

Uygulama Alanları Application



Fonksiyon Fuction

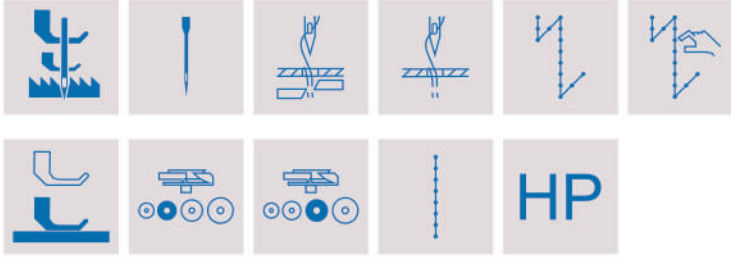**Çalışma Kapsamı**

- Maksimum dikiş uzunluğu 9 mm'dir.
- En kalın dikiş ipliği Nm10/3'tür.
- En yüksek dikiş hızı 3000 dikiş/dakika'dır.

Ürün Özellikleri

- Güçlü üçlü senkronize besleme sistemi (alt besleme, iğne beslemesi ve alternatif baskı ayağı üst beslemesi dahil) kumaşın sorunsuz ve kaymadan taşınmasını sağlar.
- Baskı ayağı kaldırma yüksekliği 20 mm'ye kadar çıkarak büyük kumaş alanlarının işlenmesini kolaylaştırır.
- Baskı ayağı kaldırma 9 mm'ye kadar çıkarak farklı kalınlıklardaki kumaşların güvenli bir şekilde aşılmasını sağlar.
- Çok geniş kol altı alanı (335 mm genişlik ve 125 mm yükseklik) büyük kumaş alanlarının rahatça işlenmesini sağlar.
- Otomatik iplik kesme, otomatik geri dikiş ve pnömatik baskı ayağı kaldırma gibi etkili temel fonksiyonlar bulunur.

Scope of Work

- Maximum stitch length is 9 mm.
- The thickest thread is Nm10/3.
- The maximum sewing speed is 3000 stit/min.

Product Features

- The powerful triple synchronized feed system (including bottom feed, needle feed, and alternating presser foot top feed) ensures smooth and slip-free transport of the fabric.
- The presser foot lift height can be increased up to 20 mm, making it easier to process large fabric areas.
- The presser foot stroke can be increased up to 9 mm, allowing for safe passage over fabrics of different thicknesses.
- The extra-large underarm space (335 mm wide and 125 mm high) allows for comfortable processing of large fabric areas.
- Efficient basic functions such as automatic thread trimming, automatic reverse stitching, and pneumatic presser foot lifting are available.


669-111126
669-111226
669-121126
669-121226



Uygulama Alanları Application



Fonksiyon Fuction

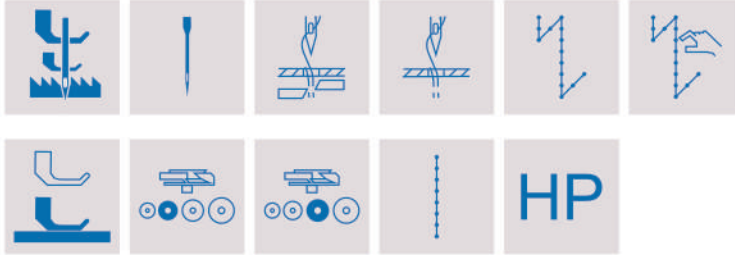

Çalışma Kapsamı

- Maksimum dikiş uzunluğu 9 mm'dir.
- En kalın dikiş ipliği Nm10/3'tür.
- En yüksek dikiş hızı 3000 dikiş/dakika'dır.

Ürün Özellikleri

- Güçlü üçlü senkronize besleme sistemi (alt besleme, iğne beslemesi ve alternatif baskı ayağı üst beslemesi dahil) kumaşın sorunsuz ve kaymadan taşınmasını sağlar.
- Baskı ayağı kaldırma yüksekliği 20 mm'ye kadar çıkarak büyük kumaş alanlarının işlenmesini kolaylaştırır.
- Baskı ayağı kaldırma 9 mm'ye kadar çıkarak farklı kalınlıklardaki kumaşların güvenli bir şekilde aşılmasını sağlar.
- Çok geniş kol altı alanı (335 mm genişlik ve 125 mm yükseklik) büyük kumaş alanlarının rahatça işlenmesini sağlar.
- Otomatik iplik kesme, otomatik geri dikiş ve pnömomatik baskı ayağı kaldırma gibi etkili temel fonksiyonlar bulunur.

Scope of Work

- Maximum stitch length is 9 mm.
- The thickest thread is Nm10/3.
- The maximum sewing speed is 3000 stit/min.

Product Features


- The powerful triple synchronized feed system (including bottom feed, needle feed, and alternating presser foot top feed) ensures smooth and slip-free transport of the fabric.
- The presser foot lift height can be increased up to 20 mm, making it easier to process large fabric areas.
- The presser foot stroke can be increased up to 9 mm, allowing for safe passage over fabrics of different thicknesses.
- The extra-large underarm space (335 mm wide and 125 mm high) allows for comfortable processing of large fabric areas.
- Efficient basic functions such as automatic thread trimming, automatic reverse stitching, and pneumatic presser foot lifting are available.

VİOS®

Uygulama Alanları Application



Fonksiyon Fuction

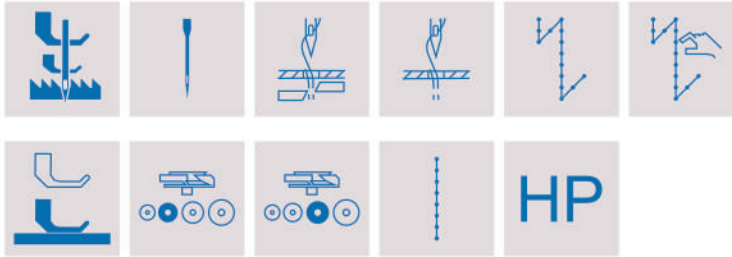**Çalışma Alanı:**

- **Dikiş Uzunluğu:** 9 mm (K modelinde 12 mm)
- **İplik Kalınlığı:** Nm10/3 (K modelinde Nm5/3)
- **Dikiş Hızı:** 3000 dikiş/dk (K modelinde 1500 dikiş/dk)

Özellikler:

- Kumaşı kaydırmadan taşıyan 3'lü senkronize besleme sistemi
- 20 mm'ye kadar kalkan baskı ayağı ile büyük kumaşları kolay işleme
- Farklı kalınlıklardaki kumaşları aşabilen 9 mm'ye kadar baskı ayağı stroku
- Geniş çalışma alanı (335 mm x 125 mm)
- Otomatik iplik kesme, geri dikiş ve pnömatik baskı ayağı kaldırma
- Standart modele göre %70 daha fazla bobin kapasitesi sunan büyük döner mekik

Scope of Work:

- **Stitch Length:** 9 mm (12 mm for K model)
- **Thread Thickness:** Nm10/3 (Nm5/3 for K model)
- **Sewing Speed:** 3000 stitches/min (1500 stitches/min for K model)

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model

877 Çift İğneli 877 Double Needle

VIOS®


877-211126
877-211226
877-221126
877-221226
877-211132
877-211232
877-221132
877-221232



Uygulama Alanları Application



Fonksiyon Fuction

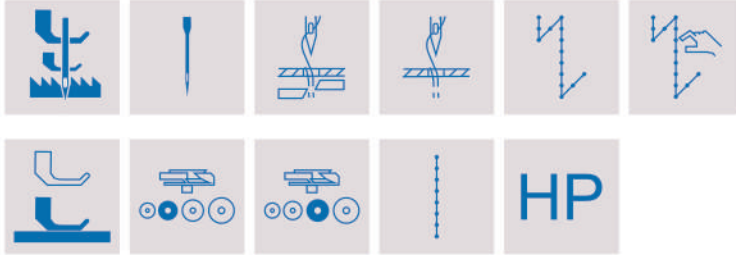

Çalışma Alanı:

- **Dikiş Uzunluğu:** 9 mm (K modelinde 12 mm)
- **İplik Kalınlığı:** Nm10/3 (K modelinde Nm5/3)
- **Dikiş Hızı:** 3000 dikiş/dk (K modelinde 1500 dikiş/dk)

Özellikler:

- Kumaşı kaydırmadan taşıyan 3'lü senkronize besleme sistemi
- 20 mm'ye kadar kalkan baskı ayağı ile büyük kumaşları kolay işleme
- Farklı kalınlıklardaki kumaşları aşabilen 9 mm'ye kadar baskı ayağı stroku
- Geniş çalışma alanı (335 mm x 125 mm)
- Otomatik iplik kesme, geri dikiş ve pnömatik baskı ayağı kaldırma
- Standart modele göre %70 daha fazla bobin kapasitesi sunan büyük döner mekik

Scope of Work:

- **Stitch Length:** 9 mm (12 mm for K model)
- **Thread Thickness:** Nm10/3 (Nm5/3 for K model)
- **Sewing Speed:** 3000 stitches/min (1500 stitches/min for K model)

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model


VIOS®



Uygulama Alanları Application



Fonksiyon Fuction

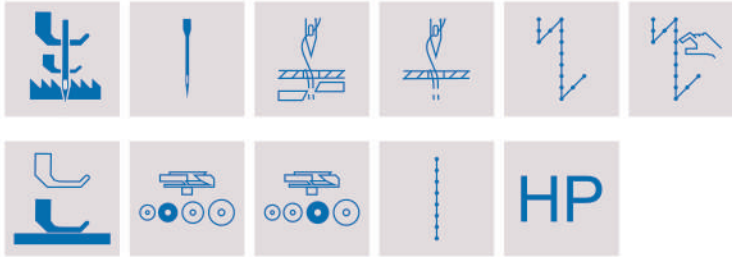

Çalışma Alanı:

- **Dikiş Uzunluğu:** 9 mm
- **İplik Kalınlığı:** Nm10/3
- **Dikiş Hızı:** 2500 dikiş/dk

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model

Scope of Work:

- **Stitch Length:** 9 mm
- **Thread Thickness:** Nm10/3
- **Sewing Speed:** 2500 stitches/min

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model

878 Mekanik Çift İğneli 878 Mechanic Double Needle

VIOS®


877-210126
877-210226
877-220126
877-220226
877-210132
877-210232
877-220132
877-220232



Uygulama Alanları Application



Fonksiyon Fuction

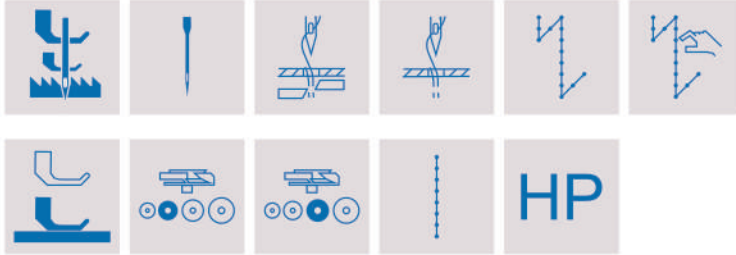

Çalışma Alanı:

- **Dikiş Uzunluğu:** 9 mm
- **İplik Kalınlığı:** Nm10/3
- **Dikiş Hızı:** 2500 dikiş/dk

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model

Scope of Work:

- **Stitch Length:** 9 mm
- **Thread Thickness:** Nm10/3
- **Sewing Speed:** 2500 stitches/min

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model


VIOS®



Uygulama Alanları Application



Fonksiyon Fuction

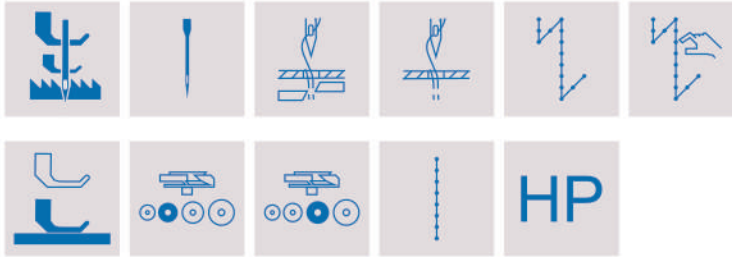

Çalışma Alanı:

- **Dikiş Uzunluğu:** 9 mm
- **İplik Kalınlığı:** Nm10/3
- **Dikiş Hızı:** 2500 dikiş/dk

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model

Scope of Work:

- **Stitch Length:** 9 mm
- **Thread Thickness:** Nm10/3
- **Sewing Speed:** 2500 stitches/min

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model

878 Otomatik Çift İğneli 878 Automatic Double Needle

VIOS®


878-211126
878-211226
878-221126
878-221226
878-211132
878-211232
878-221132
878-221232



Uygulama Alanları Application



Fonksiyon Fuction

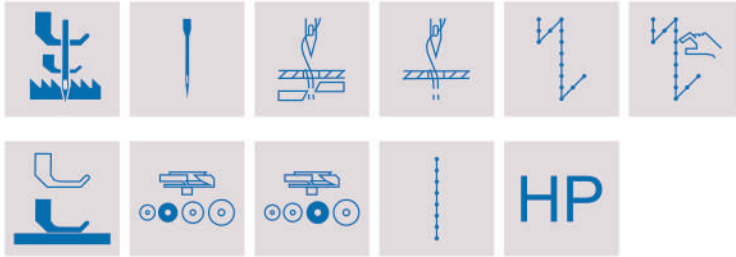

Çalışma Alanı:

- **Dikiş Uzunluğu:** 9 mm
- **İplik Kalınlığı:** Nm10/3
- **Dikiş Hızı:** 2500 dikiş/dk

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model

Scope of Work:

- **Stitch Length:** 9 mm
- **Thread Thickness:** Nm10/3
- **Sewing Speed:** 2500 stitches/min

Features:

- 3-way synchronized feed system for smooth fabric transport
- 20 mm liftable presser foot for easy handling of large fabrics
- 9 mm presser foot stroke for various fabric thicknesses
- Wide working space (335 mm x 125 mm)
- Automatic thread trimming, reverse stitching, and pneumatic presser foot lifting
- Large rotary hook with 70% more bobbin capacity than standard model